

19530 Ramblewood Drive Humble, Texas 77338 Phone: (281) 540-6603 FAX: (281) 540-9966 Website: www.forceengineeringtesting.com

Product Evaluation Report GUARDIAN METALS, LLC

## Minimum 29 Ga. Rib-Tech Roof Panel over 15/32" Plywood

## Florida Product Approval # 42457.2

Florida Building Code 2023 Per Rule 61G20-3 Method: 1 –D


Category: Roofing Subcategory: Metal Roofing Compliance Method: 61G20-3.005(1)(d) NON HVHZ

Product Manufacturer:

Guardian Metals, LLC 450042 State Road 200 Callahan, Florida 32011

Engineer Evaluator: Johnathan Green, P.E. #88223 Florida Evaluation ANE ID: 12901

<u>Contents:</u> Evaluation Report: Page 1 - 3 Installation Detail: Page 4

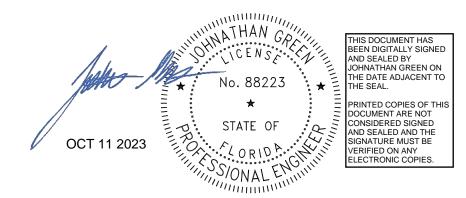

	Force Engineering & Testing 19530 Ramblewood Drive Humble, Texas 77338 Phone: (281) 540-6603 FAX: (281) 540-9966 Website: www.forceengineeringtesting.com
Compliance Statement:	The product as described in this report has demonstrated compliance with the Florida Building Code 2023, Sections 1504.3.2, 1504.7.
Product Description:	Rib-Tech Panel Minimum 29 Ga. Steel, 36" coverage, through fastened roof panel fastened into minimum 15/32" APA Plywood decking. Non-Structural Application.
Panel Material/Standards:	Material: 29 Ga. Steel conforming to Florida Building Code 2023 Section 1507.4.3. Yield Strength: Min. 80.0 ksi Corrosion Resistance: Panel Material shall comply with Florida Building Code 2023, Section 1507.4.3.
Panel Dimension(s):	Thickness:0.0145" (Nominal)Width:36" maximum coverageRib Height:¾" major rib at 9" O.C.
Panel Fastener:	#10-12 x 1 1/2" HWH Panel-Tite Burr Buster with washer or approved equal. Corrosion Resistance: Per Florida Building Code 2023, Section 1507.4.4.
Substrate Description:	Min. 15/32" thick, APA Rated plywood over supports at maximum 24" O.C. Design of plywood and plywood supports are outside the scope of this evaluation. Substrate must be designed in accordance w/ Florida Building Code.

## Allowable Design Uplift Pressures:


Table "A"				
Maximum Allowable Uplift Design Pressure:	86.0 psf	106.0 psf	126.0 psf	146.0 psf
Fastener Pattern:	9"-9"-9"-6"-3"	9"-9"-9"-6"-3"	9"-9"-9"-6"-3"	9"-9"-9"-6"-3"
Fastener Pattern Spacing:	24″ O.C.	18″ O.C.	12″ O.C.	6″ O.C.

\*Design Pressure includes a Safety Factor = 2.0.

$\sum$			
	Force Engineering & Testing		
	19530 Ramblewood Drive		
	Humble, Texas 77338 Phone: (281) 540-6603 FAX: (281) 540-9966		
	Website: www.forceengineeringtesting.com		
Code Compliance:	The product described herein has demonstrated compliance with		
	The Florida Building Code 2023, Section 1504.3.2, 1504.7.		
Evaluation Report Scope:	The product evaluation is limited to compliance with the structural wind load requirements of the Florida Building Code 2023, as relates to Rule 61G20-3.		
Performance Standards:	The product described herein has demonstrated compliance with:		
	<ul> <li>UL 580-06 - Test for Uplift Resistance of Roof Assemblies</li> </ul>		
	<ul> <li>UL 1897-2015 - Uplift Test for Roof Covering Systems</li> <li>FM 4471-92 - Foot Traffic Resistance Test</li> </ul>		
Reference Data:	1. UL 580-06 / 1897-2015 Uplift Test Force Engineering & Testing (EPC Organization # TST 5228)		
	Force Engineering & Testing (FBC Organization # TST-5328) Report No. 790-0119T-23.		
	2. FM 4471-10, Section 4.4 Foot Traffic Resistance Test		
	Force Engineering & Testing (FBC Organization # TST-5328) Report No. 790-0119T-23.		
	3. Certificate of Independence		
	By Johnathan Green, P.E. #88223		
Test Standard Equivalency:	The FM 4471-10, Foot Traffic Resistance test standard is equivalent to the FM 4471-92, Foot Traffic Resistance test standard.		
Quality Assurance Entity:	The manufacturer has established compliance of roof panel products in accordance with the Florida Building Code and Rule 61G20-3.005 (3) for manufacturing under a quality assurance program audited by an approved quality assurance entity.		
Minimum Slope Range:	Minimum Slope shall comply with Florida Building Code 2023, including Section		
	1507.4.2 and in accordance with Manufacturers recommendations. For slopes less than 3:12, lap sealant must be used in the panel side laps.		
Installation:	Install per manufacturer's recommended details.		
Underlayment:	Per Florida Building Code 2023, Section 1507.1 and manufacturer's installation guidelines.		
Roof Panel Fire Classification:	Fire classification is not part of this evaluation.		
Shear Diaphragm:	Shear diaphragm values are outside the scope of this report.		
Design Procedure:	Based on the dimensions of the structure, appropriate wind loads are determined using Chapter 16 of the Florida Building Code 2023 for roof cladding wind loads. These component wind loads for roof cladding are compared to the allowable pressure listed above. The design professional shall select the appropriate erection details to reference in his drawings for proper fastener attachment to his structure and analyze the panel fasteners for pullout and pullover. Support framing must be in compliance with Florida Building Code 2023 Chapter 22 for steel, Chapter 23 for wood and Chapter 16 for structural loading.		



FASTENER PATTERN AT PANEL INTERIOR

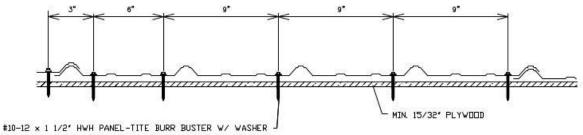

#10-12 × 1 1/2" HWH PANEL-TITE BURR BUSTER W/ WASHER -9"-9"-9"-6"-3" FASTENER PATTERN (SEE TABLE A FOR SPACING)

FASTENER PATTERN AT PANEL ENDS

